

FREE-STANDING HORIZONTAL RAIL SYSTEMS



The Free-Standing Horizontal Rail Fall-Arrest System combines the simplicity of a horizontal rail and trolley system with a portable support structure to provide reliable fall-protection where it's needed, when it's needed. The Free-Standing Horizontal Rail Fall-Arrest System is ideal for work on or near sensitive equipment, such as aircraft, where physical contact is undesirable.



FREE-STANDING HORIZONTAL RAIL SYSTEMS

Constructed of lightweight powder-coated aluminum and zinc-plated steel, the **Free-Standing Horizontal Rail Fall-Arrest System** is easily assembled and quickly disassembled for storage or transport.

FEATURES

■ Rugged Frame

Constructed from powder-coated aluminum and zinc-plated steel for corrosion resistance and maximum durability

■ Lightweight

Easily moved by hand

■ Adjustable Height

Optimizes utility

CUSTOM DESIGNS

Available in a range of heights and wheel styles, the system can be ordered to meet your applications' custom requirements.

OSHA COMPLIANT

The Mobile Access Platform meets the applicable requirements of the standards set out by the following:

Requirement for fixed ladders

- 1) OSHA 1910.26 Portable metal ladders
- 2) CSAZ11-M81 Portable ladders
- 3) OSHA 1910.23 Guarding floor/wall openings & holes
- 4) Manitoba Workplace Safety & Health Division Fall Protection Guidelines

WHY FLS?

Maximizing the fall-safety provided by the Mobile Access Platform requires the proper harnesses, lanyards, and training. **FLS is your turnkey fall-protection provider.** Piecemeal competitors can't compare with FLS' turnkey costs and services.



LARGE

- 34' Rail Height** adjustable to minimum rail height of 20'
- 20' Rail Width** 198517713 (Pneumatic) 198517712 (Urethane)
- 15' Rail Width** 198517711 (Pneumatic) 198517710 (Urethane)



MEDIUM

- 26' Rail Height** adjustable to minimum rail height of 16'
- 20' Rail Width** 198517709 (P) 198517708 (U)
- 15' Rail Width** 198517707 (P) 198517706 (U)




SMALL

- 18' Rail Height** Adjustable to minimum rail height of 12'
- 20' Rail Width** 198517705 (P) 198517704 (U)
- 15' Rail Width** 198517703 (P) 198517702 (U)
- 10' Rail Width** 198517701 (P) 198517700 (U)

- Optional Double Track** Available allows each worker to use entire length of rail



Each system comes standard with two man rated rail trolleys for anchorage of a Personal Fall Arrest System (PFAS)

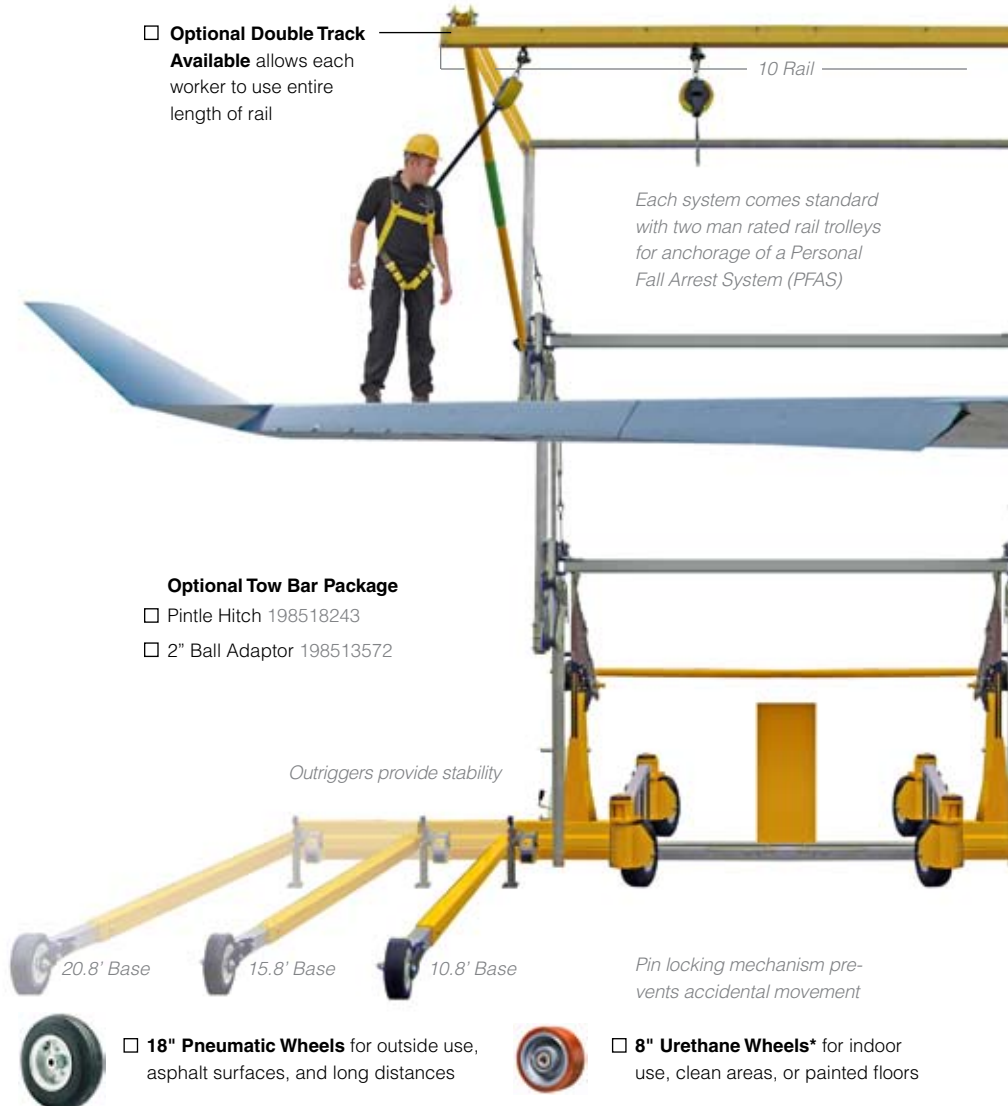

Optional Tow Bar Package

- Pintle Hitch 198518243
- 2" Ball Adaptor 198513572

Outriggers provide stability

20.8' Base

15.8' Base

10.8' Base

Pin locking mechanism prevents accidental movement



- 18" Pneumatic Wheels** for outside use, asphalt surfaces, and long distances



- 8" Urethane Wheels*** for indoor use, clean areas, or painted floors

*Listed platform height measurements reduced 10 inches when using urethane wheels