

FREE-STANDING MOBILE ACCESS PLATFORM



The Free-Standing Mobile Access Platform combines easy access to elevated work areas with fall protection for the duration of the work being performed. Each unit comes standard with two tie off masts and a ladder anchorage attachment point. The units transport easily on the pneumatic wheels, and come in a range of heights and wheel styles to meet your exact requirements.



FREE-STANDING MOBILE ACCESS PLATFORM

The Free-Standing Mobile Access Platform

provides access to elevated work areas with fall-protection.

CUSTOM DESIGNS

Available in a range of heights and wheel styles, the system can be ordered to meet your applications' custom requirements. FLS also produces **Hybrid Mobile Access Platforms** that includes an attached 20' horizontal flexrail, increasing the user's applicable work area and mobility.



OSHA COMPLIANT

The Mobile Access Platform meets the applicable requirements of the standards set out by the following:

- 1) ANSI 14.3 Requirement for fixed ladders
- 2) OSHA 1910.26 Portable metal ladders
- 3) CSAZ11-M81 Portable ladders
- 4) OSHA 1910.23 Guarding floor/wall openings & holes
- 5) Manitoba Workplace Safety & Health Division Fall Protection Guidelines


WHY FLS?

Maximizing the fall-safety provided by the Mobile Access Platform requires the proper harnesses, lanyards, and training. **FLS is your turnkey fall-protection provider.** One manager with total accountability guides your project every step of the way. Piecemeal competitors can't compare with FLS' turnkey costs and services.



FEATURES

- **Rugged Frame**
Constructed from powder coated aluminum and zinc-plated steel for corrosion resistance and maximum durability
- **Lightweight**
Easily moved by hand
- **Adjustable Height**
Optimizes utility

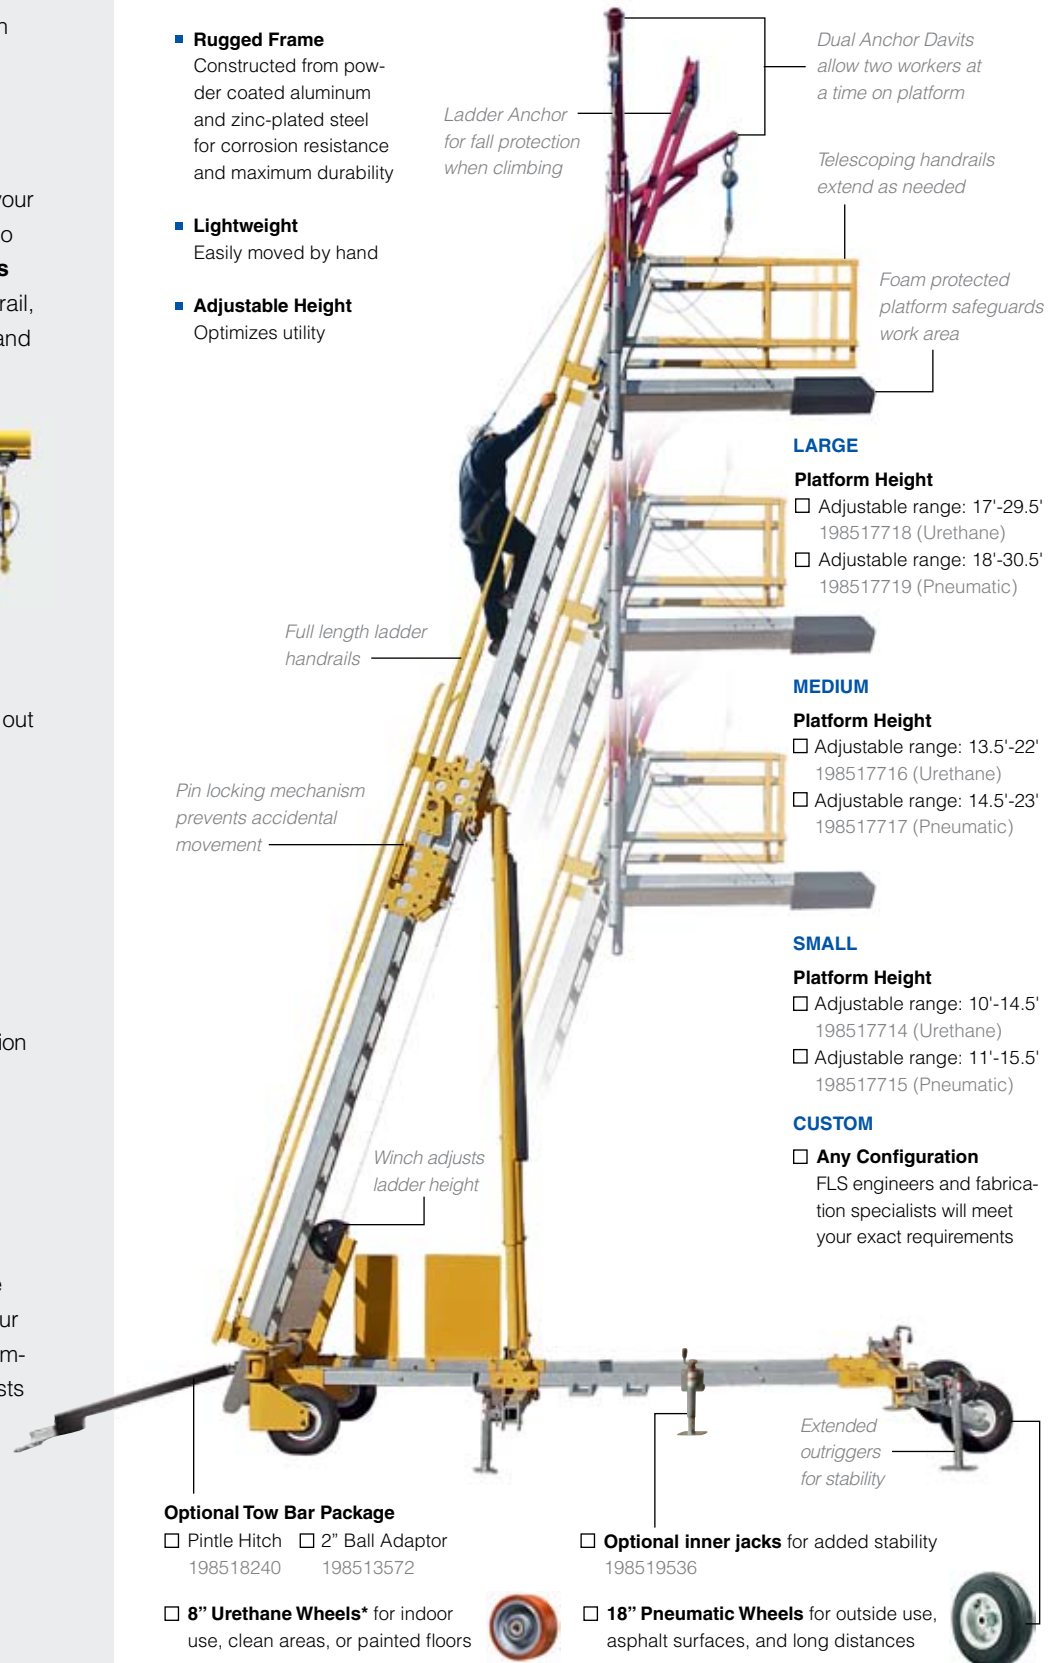

Dual Anchor Davits allow two workers at a time on platform

Telescoping handrails extend as needed

Foam protected platform safeguards work area

Ladder Anchor for fall protection when climbing

Full length ladder handrails

Pin locking mechanism prevents accidental movement

Winch adjusts ladder height

LARGE

Platform Height

- Adjustable range: 17'-29.5'
198517718 (Urethane)
- Adjustable range: 18'-30.5'
198517719 (Pneumatic)

MEDIUM

Platform Height

- Adjustable range: 13.5'-22'
198517716 (Urethane)
- Adjustable range: 14.5'-23'
198517717 (Pneumatic)

SMALL

Platform Height

- Adjustable range: 10'-14.5'
198517714 (Urethane)
- Adjustable range: 11'-15.5'
198517715 (Pneumatic)

CUSTOM

- Any Configuration**
FLS engineers and fabrication specialists will meet your exact requirements

Optional Tow Bar Package

- Pintle Hitch 198518240
- 2" Ball Adaptor 198513572

- 8" Urethane Wheels*** for indoor use, clean areas, or painted floors

- Optional inner jacks** for added stability 198519536

- 18" Pneumatic Wheels** for outside use, asphalt surfaces, and long distances

Extended outriggers for stability