

## CHEMICAL ADHESIVE TIEBACK ANCHORS



FLS Chemical Adhesive Tieback Anchors are a safe, practical and permanent anchorage solution. Cost effective and proven, Tieback Anchors are used for fall protection and a wide range of suspended access applications, including window cleaning and exterior building maintenance. The Tieback Anchor provides an ideal safety solution for rope descent systems where specific use and height restrictions apply and workers are operating suspended power platforms and temporary rigging equipment, or anywhere leading edge hazards exist.




## CHEMICAL ADHESIVE TIEBACK ANCHORS

### FEATURES


- **Proven Design** over 2,000 installations worldwide
- **Cost Effective** without sacrificing safety. FLS safety tiebacks are an economical choice compared to many alternative solutions
- **Simple to Use** design of tie back anchors result in increased productivity

**STAINLESS STEEL**

Stainless steel consists of a high sheen surface that is designed to resist multiple corrosive agents. It is required in certain applications such as ocean front buildings or as designated by architect.



The Chemical Adhesive Tieback Anchor is attached via drilled bolts reinforced with a chemical seal

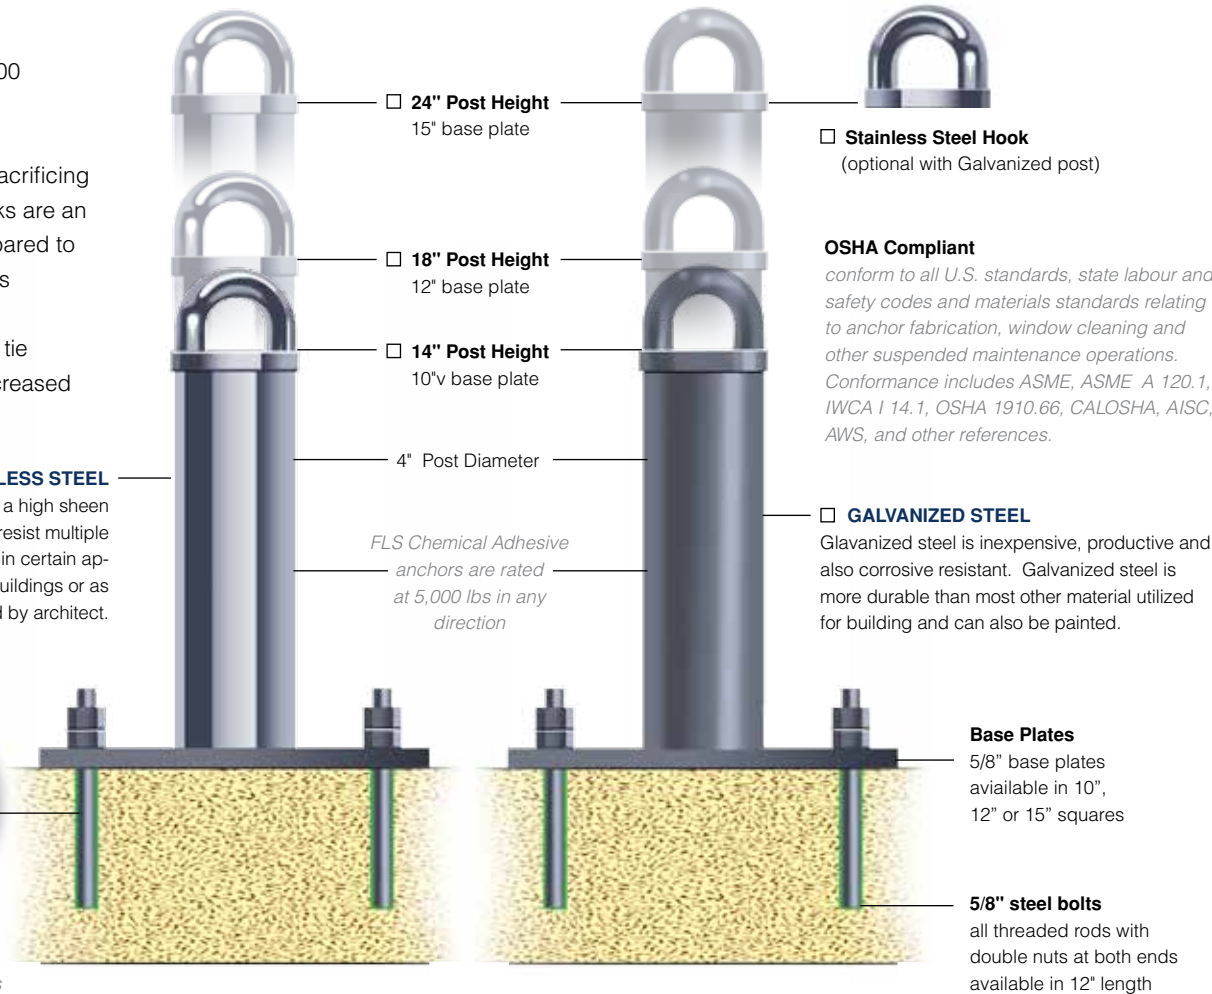

**Stainless Steel Hook**  
(optional with Galvanized post)

**OSHA Compliant**

conform to all U.S. standards, state labour and safety codes and materials standards relating to anchor fabrication, window cleaning and other suspended maintenance operations. Conformance includes ASME, ASME A 120.1, IWCA I 14.1, OSHA 1910.66, CALOSHA, AISC, AWS, and other references.

**GALVANIZED STEEL**

Galvanized steel is inexpensive, productive and also corrosive resistant. Galvanized steel is more durable than most other material utilized for building and can also be painted.

**Base Plates**

5/8" base plates available in 10", 12" or 15" squares

**5/8" steel bolts**

all threaded rods with double nuts at both ends available in 12" length

**ALL MOUNTING HARDWARE IS INCLUDED IN PRICE**

### USAGES

Suitable for all flat roofs as fall arrest anchors for securing workers' lifelines, suspension of boatswain chair or the tying back of temporary suspended access equipment such as outrigger beams.

### INSPECTION

Regulatory authorities require anchors to be inspected annually by a qualified person with the inspection date, name of the inspector, his signature and company plus any comments recorded in the Building Façade Maintenance Equipment log book.

### RE CERTIFICATION

FLS recommends anchors be re-certified every five (5) years or when re-roofing or renovating pertinent to the window cleaning system. The report and certification shall be included in the log-book. The re-certification shall be under the direct supervision of a registered professional engineer.

### WHY FLS?

Maximizing the fall-safety provided by the Tieback Anchors requires the proper harnesses, lanyards, and training. **FLS is your turnkey fall-protection provider.** Piecemeal competitors can't compare with FLS' turnkey costs and services.

### CHEMICAL ADHESIVE TIEBACK ANCHOR PART NUMBERS

Galvanized Steel Post with Galvanized Eye				Galvanized Steel Post with Stainless Steel Eye				Stainless Steel Post with Stainless Steel Eye			
Part #	Ht.	Base*	Bolt (Kit)	Part #	Ht.	Base*	Bolt (Kit)	Part #	Ht.	Base*	Bolt (Kit)
10TBCU1014	14"	10"	12" (2)	10TBCS1014	14"	10"	12" (2)	10TBCSS1014	14"	10"	12" (2)
10TBCU1218	18"	12"	12" (2)	10TBCS1218	18"	12"	12" (2)	10TBCSS1218	18"	12"	12" (2)
10TBCU1524	24"	15"	12" (2)	10TBCS1524	24"	15"	12" (2)	10TBCSS1524	24"	15"	12" (2)

All Mounting hardware is included. Kits consist of 4 bolts (5/8" x the designated bolt length), 16 nuts (5/8") and 8 flat washers (5/8")

\*All bases are square (ie 10"x10", 12"x12", or 15"x15")

