

EMBEDDED TIEBACK ANCHORS



FLS Embedded Tieback Anchors are a safe, practical and permanent anchorage solution. Cost effective and proven, Embedded Tieback Anchors are used for fall protection and a wide range of suspended access applications, including window cleaning and exterior building maintenance. The Tieback anchor provides an ideal safety solution for rope descent systems where specific use and height restrictions apply and workers are operating suspended power platforms and temporary rigging equipment.



EMBEDDED TIEBACK ANCHORS

FEATURES


- **Proven Design** over 2,000 installations worldwide
- **Cost Effective** without sacrificing safety. FLS safety tiebacks are an economical choice compared to many alternative solutions
- **Simple to Use** design of tie back anchors result in increased productivity

□ STAINLESS STEEL

Stainless steel consists of a high sheen surface that is designed to resist multiple corrosive agents. It is required in certain applications such as ocean front buildings and as designated by architect.

Embedded Tieback Anchors are integrated with the rooftop via poured concrete and interlocking rebar

ALL MOUNTING HARDWARE IS INCLUDED IN PRICE

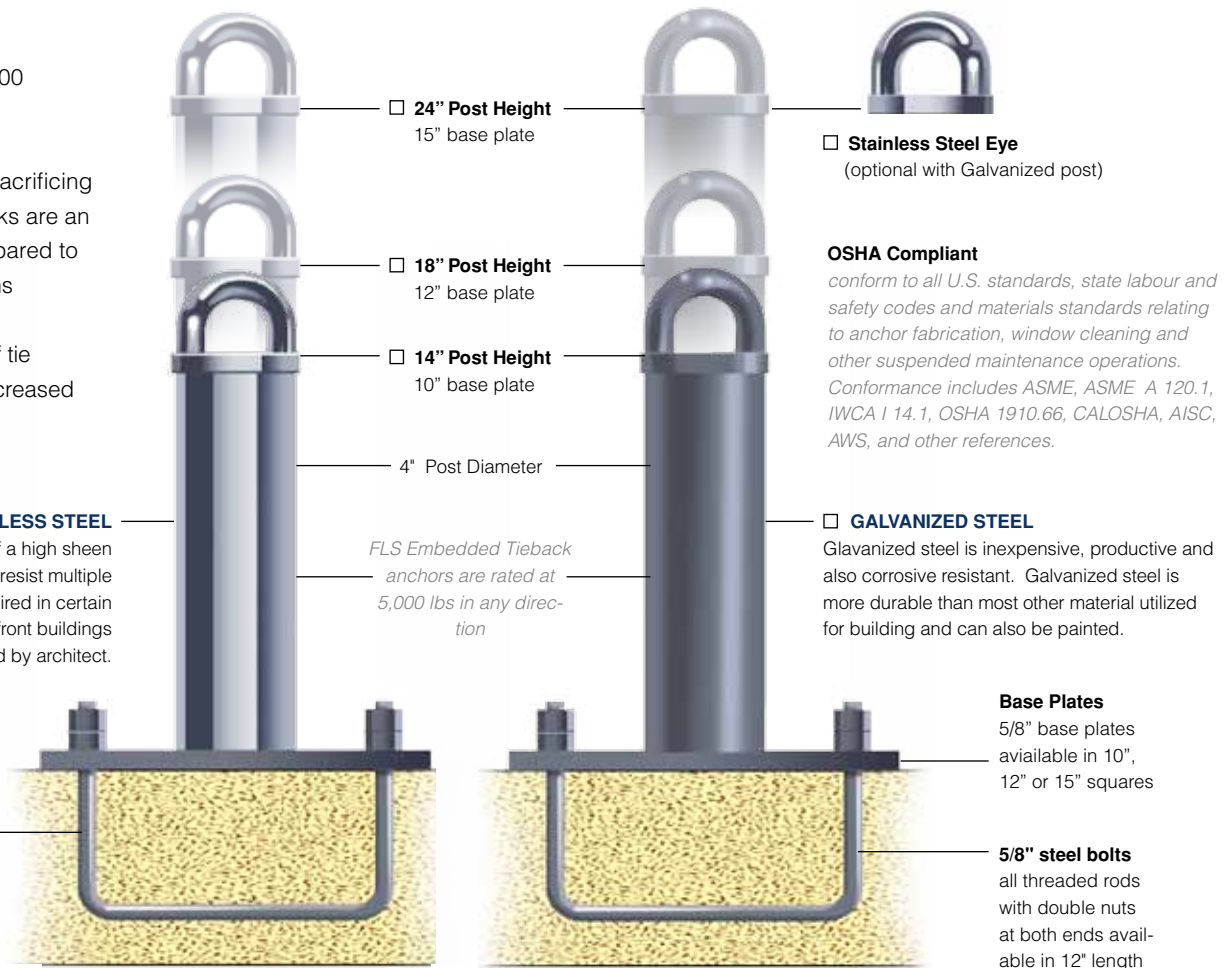

- **24" Post Height**
15" base plate
- **18" Post Height**
12" base plate
- **14" Post Height**
10" base plate
- **4" Post Diameter**
- **Stainless Steel Eye**
(optional with Galvanized post)

OSHA Compliant

conform to all U.S. standards, state labour and safety codes and materials standards relating to anchor fabrication, window cleaning and other suspended maintenance operations. Conformance includes ASME, ASME A 120.1, IWCA I 14.1, OSHA 1910.66, CALOSHA, AISC, AWS, and other references.

□ GALVANIZED STEEL

Galvanized steel is inexpensive, productive and also corrosive resistant. Galvanized steel is more durable than most other material utilized for building and can also be painted.

Base Plates

5/8" base plates available in 10", 12" or 15" squares

5/8" steel bolts
all threaded rods with double nuts at both ends available in 12" length



Easy to use snap-on design

INSPECTION

Regulatory authorities require anchors to be inspected annually by a qualified person with the inspection date, name of the inspector, his signature and company plus any comments recorded in the Building Façade Maintenance Equipment log book.

RE CERTIFICATION

FLS recommends anchors be re-certified every five (5) years or when re-roofing or renovating pertinent to the window cleaning system. The report and certification shall be included in the log-book. The re-certification shall be under the direct supervision of a registered professional engineer.

WHY FLS?

Maximizing the fall-safety provided by the Tieback Anchors requires the proper harnesses, lanyards, and training. **FLS is your turnkey fall-protection provider.** Piecemeal competitors can't compare with FLS' turnkey costs and services.

EMBEDDED TIEBACK ANCHOR PART NUMBERS

Galvanized Steel Post with Galvanized Eye

Part #	Ht.	Base*	Bolt (Kit)
10TBEU1014	14"	10"	12" (4)
10TBEU1218	18"	12"	12" (4)
10TBEU1524	24"	15"	12" (4)

Galvanized Steel Post with Stainless Steel Eye

Part #	Ht.	Base*	Bolt (Kit)
10TBES1014	14"	10"	12" (4)
10TBES1218	18"	12"	12" (4)
10TBES1524	24"	15"	12" (4)

Stainless Steel Post with Stainless Steel Eye

Part #	Ht.	Base*	Bolt (Kit)
10TBESS1014	14"	10"	12" (4SS)
10TBESS1218	18"	12"	12" (4SS)
10TBESS1524	24"	15"	12" (4SS)

All Mounting hardware is included. Kits consist of 4 bolts (5/8" x the designated bolt length), 16 nuts (5/8") and 8 flat washers (5/8")

*All bases are square (ie 10"x10", 12"x12", or 15"x15")

